




DARK A

LED LIGHTING

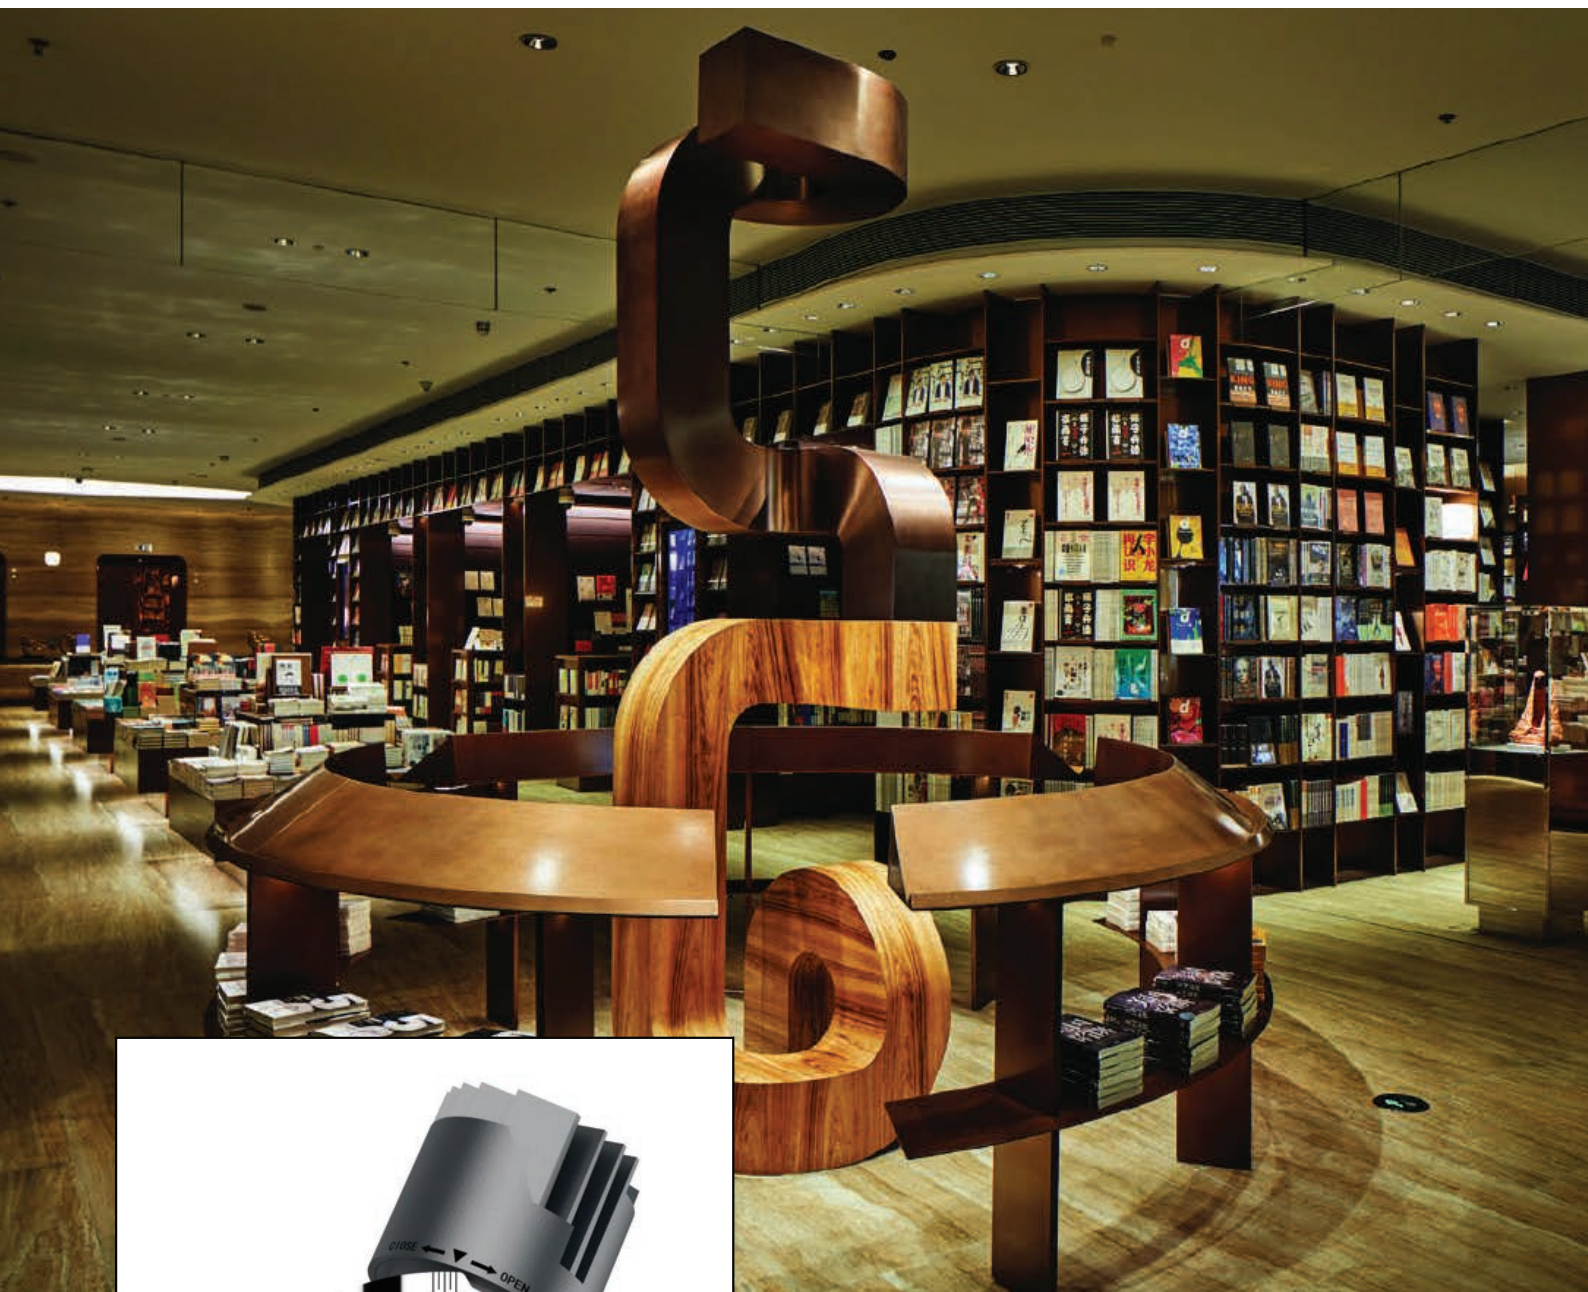


DESCRIPTIONS

Anti Glare LED Recessed Downlight for indoor use. Fashionable appearance with high texture lamp body. The design of module makes it flexible for many applications. The lamp body can integrate into the many decorative frames.


SPECIFICATIONS

Mounting	Ceiling Recessed
Light Source	COB LED
Material	Die cast Aluminum
Finish	White/ Warm White/ Black White/ Chrome
Body Color	White
Diffuser	Clear Glass
CRI	Ra>80
Beam angle	15° / 23°/ 38°
Power factor	>0.9
Ambient temperature	-20°C ~ +45°C
Average Life Time (Hrs)	50,000 Hrs
Driver Mounting	Remote
Input Voltage/ Frequency	220-240V, 50/60Hz

DIMENSIONS



PHOTOMETRIC DATA



DARK A - Recessed Downlight



APPLICATION

Hotels, Residentials, Offices, Restaurants, General illumination.



CODE	Wattage	Gross Luminous Flux (lm)	Delivered Output (lm)	Color Temperature	Dimension ØxH (mm)	
RAY-DARK A -REC DL-55MM-IP20-7W	7W	700lm	350lm	3000K/ 4000K	Ø61*80	Ø55
RAY-DARK A -REC DL-75MM-IP20-13W	13W	1300lm	850lm	3000K/ 4000K	Ø82*101	Ø75
RAY-DARK A -REC DL-95MM-IP20-21W	21W	2100lm	1650lm	3000K/ 4000K	Ø102*133	Ø95
RAY-DARK A -REC DL-120MM-IP20-30W	30W	3000lm	2800lm	3000K/ 4000K	Ø128*159	Ø120

* On/Off Remote driver Included as a standrd, 0-10 and DALI dimmable Driver as an optional.

** Available 3 hours emergency kit as an optional