

G LED 2
LED LIGHTING




DESCRIPTIONS

G LED-2 is designed for indoor area with a modern simplicity style. The soft and un-dazzling light creates a cozy and stress-free atmosphere. it is suitable for leisure spaces , hospitality places and shops.


SPECIFICATIONS

Mounting	Recessed
Light Source	COB LED
Material	Die cast Aluminum
Finish	White / Chrome
Body Color	White
Diffuser	PMMA
CRI	Ra>80
Beam angle	15° / 23° / 38°
Power factor	>0.9
Ambient temperature	-20°C ~ +45°C
Average Life Time (Hrs)	50,000 Hrs
Driver Mounting	Remote
Input Voltage/ Frequency	220-240V, 50/60Hz

DIMENSIONS



PHOTOMETRIC DATA



G LED 2 - Recessed Downlight



APPLICATION

Ideal for Hotels, Villas Restaurants, Exhibitions Showrooms.



CODE	Wattage	Gross Luminous Flux (lm)	Delivered Output (lm)	Color Temperature	Dimension WxHxL (mm)	
RAY-G LED2 -REC GDL-165X165MM-IP20-30W	30W	3100lm	2950lm	3000K/ 4000K	175* 119* 175	165x165

* On/Off Remote driver Included as a standard, 0-10 and DALI dimmable Driver as an optional.

** Available 3 hours emergency kit as an optional



G LED 2
LED LIGHTING




DESCRIPTIONS

G LED-2 is designed for indoor area with a modern simplicity style. The soft and un-dazzling light creates a cozy and stress-free atmosphere. it is suitable for leisure spaces , hospitality places and shops.


SPECIFICATIONS

Mounting	Recessed
Light Source	COB LED
Material	Die cast Aluminum
Finish	White / Chrome
Body Color	White
Diffuser	PMMA
CRI	Ra>80
Beam angle	15° / 23° / 38°
Power factor	>0.9
Ambient temperature	-20°C ~ +45°C
Average Life Time (Hrs)	50,000 Hrs
Driver Mounting	Remote
Input Voltage/ Frequency	220-240V, 50/60Hz


DIMENSIONS



PHOTOMETRIC DATA



G LED 2 - Recessed Downlight

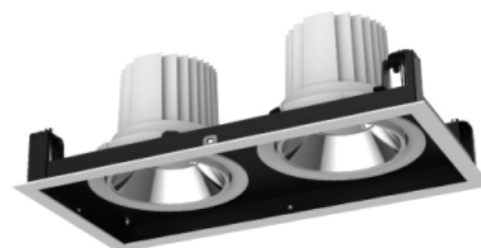

APPLICATION

Ideal for Hotels, Villas Restaurants, Exhibitions Showrooms.



CODE	Wattage	Gross Luminous Flux (lm)	Delivered Output (lm)	Color Temperature	Dimension WxHxL (mm)	
RAY-G LED2 -REC GDL-165X340MM-IP20-2X30W	60W	6200lm	5900lm	3000K/ 4000K	175* 119* 350	165x340

* On/Off Remote driver Included as a standard, 0-10 and DALI dimmable Driver as an optional.

** Available 3 hours emergency kit as an optional



G LED 2
LED LIGHTING




DESCRIPTIONS

G LED-2 is designed for indoor area with a modern simplicity style. The soft and un-dazzling light creates a cozy and stress-free atmosphere. it is suitable for leisure spaces , hospitality places and shops.

SPECIFICATIONS

Mounting	Recessed
Light Source	COB LED
Material	Die cast Aluminum
Finish	White / Chrome
Body Color	White
Diffuser	PMMA
CRI	Ra>80
Beam angle	15° / 23° / 38°
Power factor	>0.9
Ambient temperature	-20°C ~ +45°C
Average Life Time (Hrs)	50,000 Hrs
Driver Mounting	Remote
Input Voltage/ Frequency	220-240V, 50/60Hz

G LED 2 - Recessed Downlight

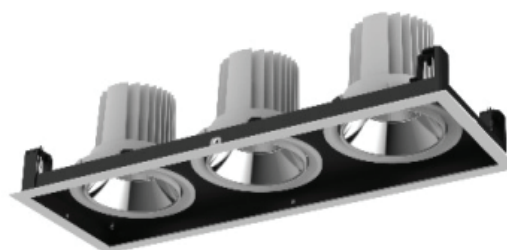


APPLICATION


Ideal for Hotels, Villas Restaurants, Exhibitions Showrooms.



DIMENSIONS



PHOTOMETRIC DATA



CODE	Wattage	Gross Luminous Flux (lm)	Delivered Output (lm)	Color Temperature	Dimension WxHxL (mm)	
RAY-G LED2 -REC GDL-165X340MM-IP20-3X30W	90W	9300lm	8900lm	3000K/ 4000K	175* 119* 500	165x490

* On/Off Remote driver Included as a standard, 0-10 and DALI dimmable Driver as an optional.

** Available 3 hours emergency kit as an optional