




البابطين للطاقة و الاتصالات  
AL-BABTAIN POWER & TELECOM

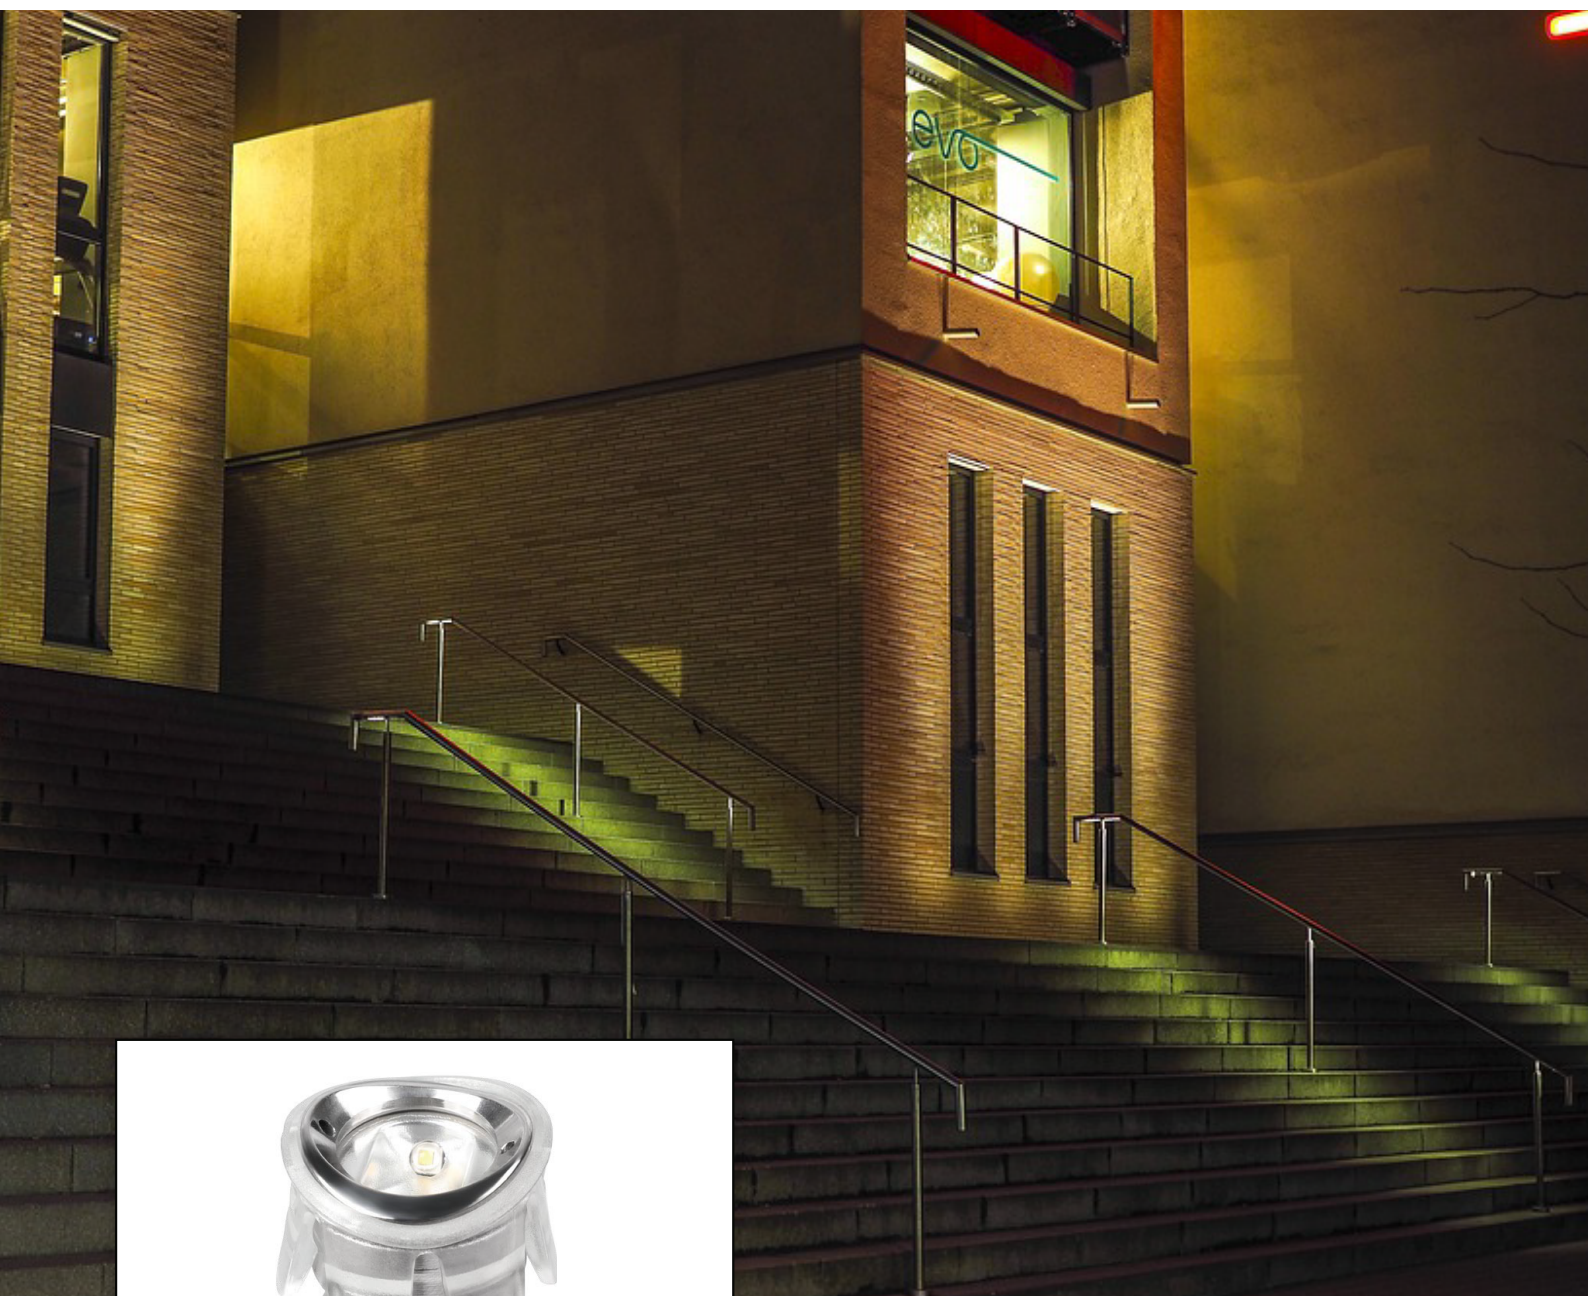

# HANDRAIL

LED LIGHTING



## DESCRIPTIONS

HANDRAIL is designed with stainless steel 304 housing, optics PMMA reflector with wonderful light output. It is suitable for standard handrail with  $\varnothing 48 \sim 60 \text{mm}$ , and wall thickness of  $1 \sim 2 \text{mm}$  for a  $\varnothing 27 \text{mm}$  hole, and With PC spring for fast recessed installation. This product is widely used in the exterior or interior handrail in multiple places, such as handrail at the house, handrail in the metro, handrail in the gallery, handrail for the stair etc.

## SPECIFICATIONS


Mounting	Recessed
Light Source	LED
Material	Stainless steel 304 housing, optics PMMA
Diffuser	PMMA Reflector
CRI	Ra>80
Beam angle	90°
Ambient temperature	-20°C ~ 50°C
Average Life Time (Hrs)	50,000 Hrs
Driver Mounting	Remote, Not included need to order it separately
Input Voltage	24VDC

## HANDRAIL - Recessed Light




## APPLICATION


For Outdoor.

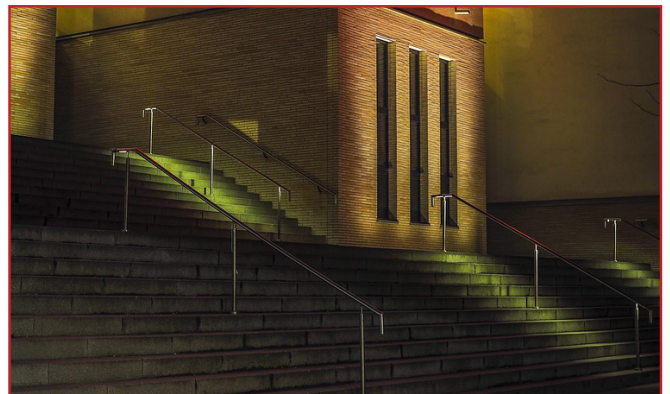

## DIMENSIONS



## PHOTOMETRIC DATA



CODE	Wattage	Delivered Output (lm)	Color Temperature	Dimension (mm)	
RAY-HANDRAIL-28MM-2W	1.5W	120lm	3000K/ 4000K	$\varnothing 28.5 \times 28$	$\varnothing 27$