



البابطين للطاقة و الاتصالات
AL-BABTAIN POWER & TELECOM



BL R1

LED LIGHTING



DESCRIPTIONS

BL R1 is a Recessed LED backlight panel, with long lifespan upto 50,000Hrs, It is perfect replacement for traditional lighting.

BL R1 - LED Panel Light


SPECIFICATIONS

Mounting	Recessed
Light Source	SMD LED
Material	Aluminum
Body Color	White
Diffuser	PC Diffuser
CRI	Ra>80
Beam angle	Very Wide
Power factor	>0.9
Ambient temperature	-20 °C ~ +45°C
Average Life Time (Hrs)	50,000 Hrs
Driver Mounting	Remote
Input Voltage/ Frequency	220-240V, 50/60Hz




APPLICATION


Offices, Hospitals, Schools, Residential Buildings, and other General illumination.

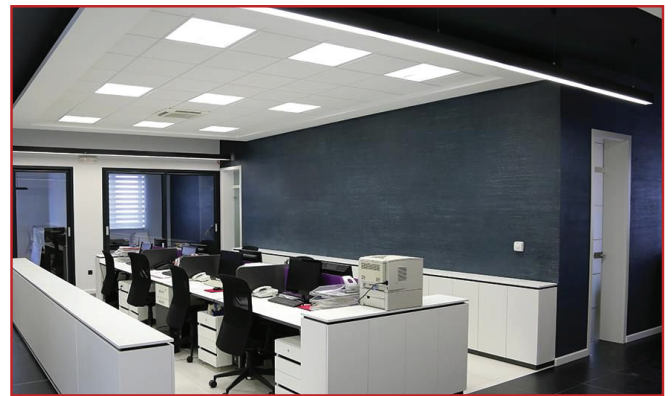

DIMENSIONS



PHOTOMETRIC DATA

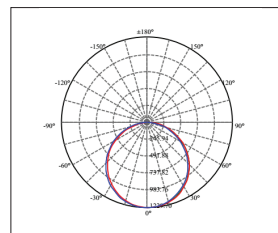

CODE	Wattage	Gross Luminous Flux (lm)	Delivered Output (lm)	Color Temperature	Dimension HxL (mm)	
RAY-BL R1-REC PAN-60X60-IP40-30W	30W	4350lm	4000lm	3000K/ 4000K/ 6500K	595*595	N/A
RAY-BL R1-REC PAN-60X60-IP40-40W	40W	4350lm	4000lm	3000K/ 4000K/ 6500K	595*595	N/A

* On/Off Remote driver Included as a standrd, 0-10 and DALI dimmable Driver as an optional.

** Available 3 hours emergency kit as an optional