




الباطين للطاقة و الاتصالات  
AL-BABTAIN POWER & TELECOM

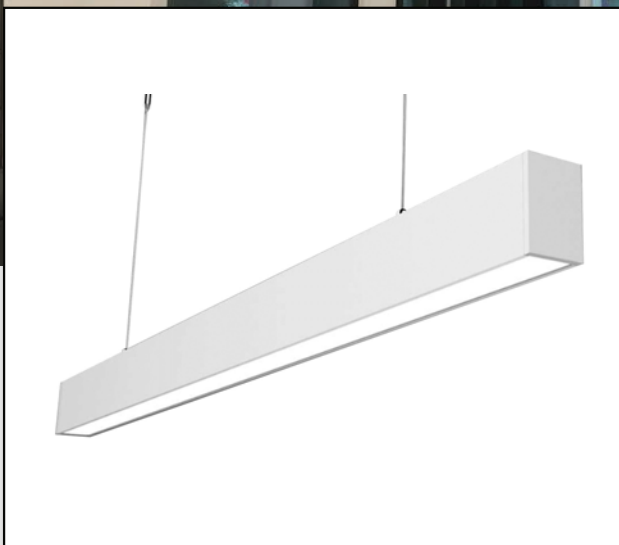

# CONTINUO

LED LIGHTING




### DESCRIPTIONS

CONTINUO represents the modern generation in linear lighting. It combines two elements: Structure and Core. The quick & easy connection design, allowing the designer to create many shapes such as continuous linear or rectangles and so on..


### SPECIFICATIONS

Mounting	Recessed / Surface / Suspension
Light Source	SMD LED
Material	Die cast Aluminum
Finish	White or Black
Body Color	White / Black
Diffuser	PC Diffuser
CRI	Ra>80
Beam angle	Very Wide
Power factor	>0.9
Ambient temperature	-20°C ~ +45°C
Average Life Time (Hrs)	50,000 Hrs
Driver Mounting	Built-in
Input Voltage/ Frequency	220-240V, 50/60Hz

### DIMENSIONS



### PHOTOMETRIC DATA




## CONTINUO - Recessed Surface



### APPLICATION

Hotels, Residuals, Offices, Restaurants, General illumination.

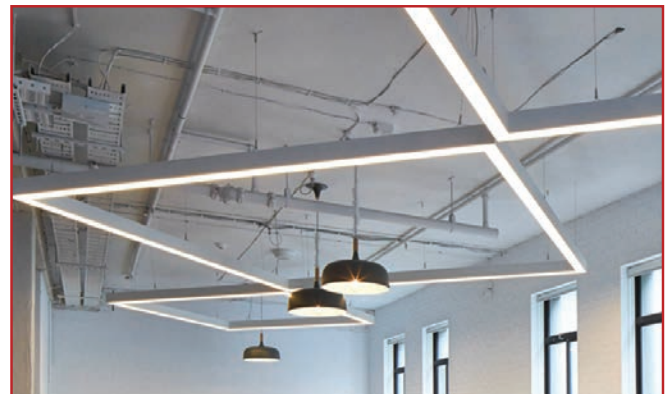

CODE	Wattage	Gross Luminous Flux (lm)	Delivered Output (lm)	Color Temperature	Dimension WxHxL (mm)	
RAY-CONTINUO-REC/SUR-1200MM-IP20-38W	38W	4500lm	4000lm	3000K/ 4000K	49* 64* 1200	N/A
RAY-CONTINUO-REC/SUR-600MM-IP20-19W	19W	2250lm	2000lm	3000K/ 4000K	49* 64* 600	N/A
RAY-CONTINUO-REC/SUR-300MM-IP20-9.5W	9.5W	1125lm	1000lm	3000K/ 4000K	49* 64* 300	N/A
RAY-CONTINUO-REC/SUR-Cross 250MM-IP20-7.5W	7.5W	890lm	790lm	3000K/ 4000K	250* 64* 250	N/A
RAY-CONTINUO-REC/SUR-T 250X150MM-IP20-12.5W	12.5W	1480lm	1300lm	3000K/ 4000K	150* 64* 250	N/A
RAY-CONTINUO-REC/SUR- L 150MM-IP20-7.5W	7.5W	890lm	790lm	3000K/ 4000K	150* 64* 150	N/A

\* On/off built in driver as a standrd, 0-10 and DALI dimmable Driver as an optional.

\*\* Available 3 hours emergency kit as an optional

## CONTINUO - Recessed Surface



### Accessories

RAY-CONTINUO-Suspension Kit

RAY-CONTINUO-Surface-mount Kit


RAY-CONTINUO-Recessed Kit



### Options



### Mounting Types



### Angles

