



الباطين للطاقة و الاتصالات
AL-BABTAIN POWER & TELECOM



ATLAS
LED LIGHTING



DESCRIPTIONS

ATLAS is a professional LED Post top .Specially designed to give a wonderful and warm ambience. igned to maintain high Performance in most severe weather conditions using high quality Die Cast aluminum housing..

SPECIFICATIONS

Mounting	POST TOP
Light Source	LED
Material	Die-casting aluminum alloy, Extruded aluminium profile
Diffuser	Clear tempered glass
CRI	Ra>70
Beam angle	details in page# 3
Ambient temperature	-20°C ~ +50°C
Average Life Time (Hrs)	50,000 Hrs
Driver Mounting	Integrated Driver
Input Voltage/ Frequency	220-240V, 50/60Hz

ATLAS - POST TOP




APPLICATION

Garden, Park, Pathway etc...




CODE	Wattage	Gross Luminous Flux (lm)	Delivered Output (lm)	Color Temperature	Dimension WxHxL (mm)	
RAY-ATLAS-URB-40W	40W	6000lm	4800lm	3000K/ 4000K	as per drawing	N/A
RAY-ATLAS-URB-60W	60W	9000lm	6900lm	3000K/ 4000K	as per drawing	N/A

Photometry

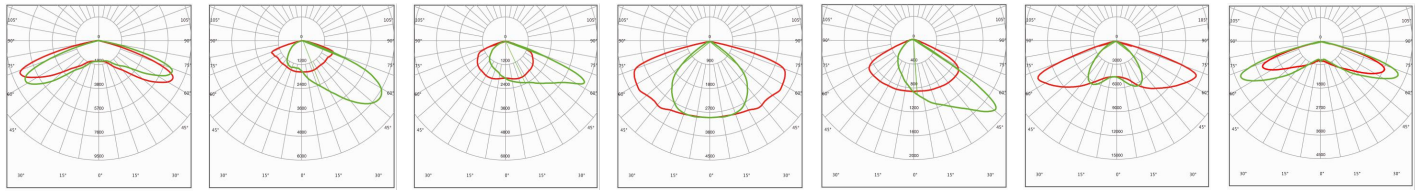


Mounting Options

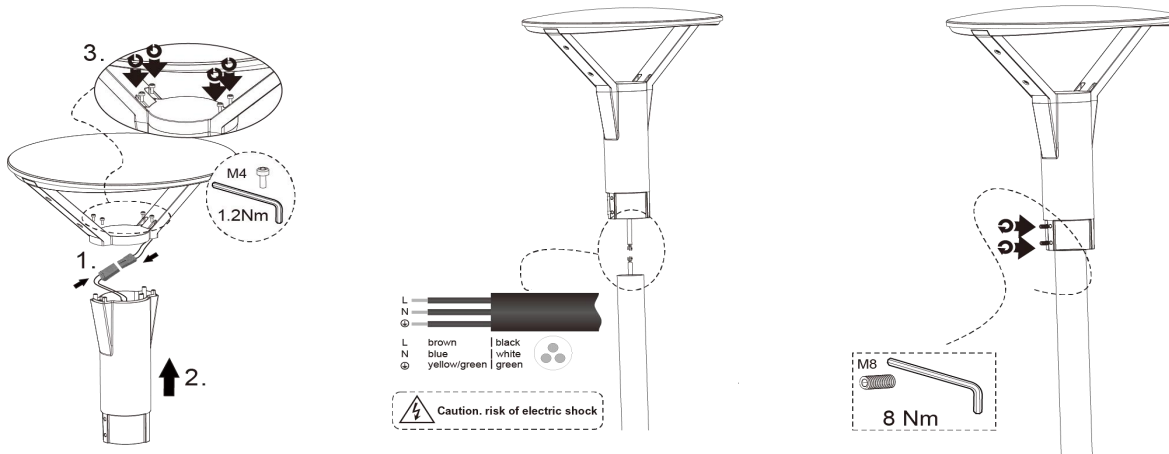

Dimensions

Unit:mm

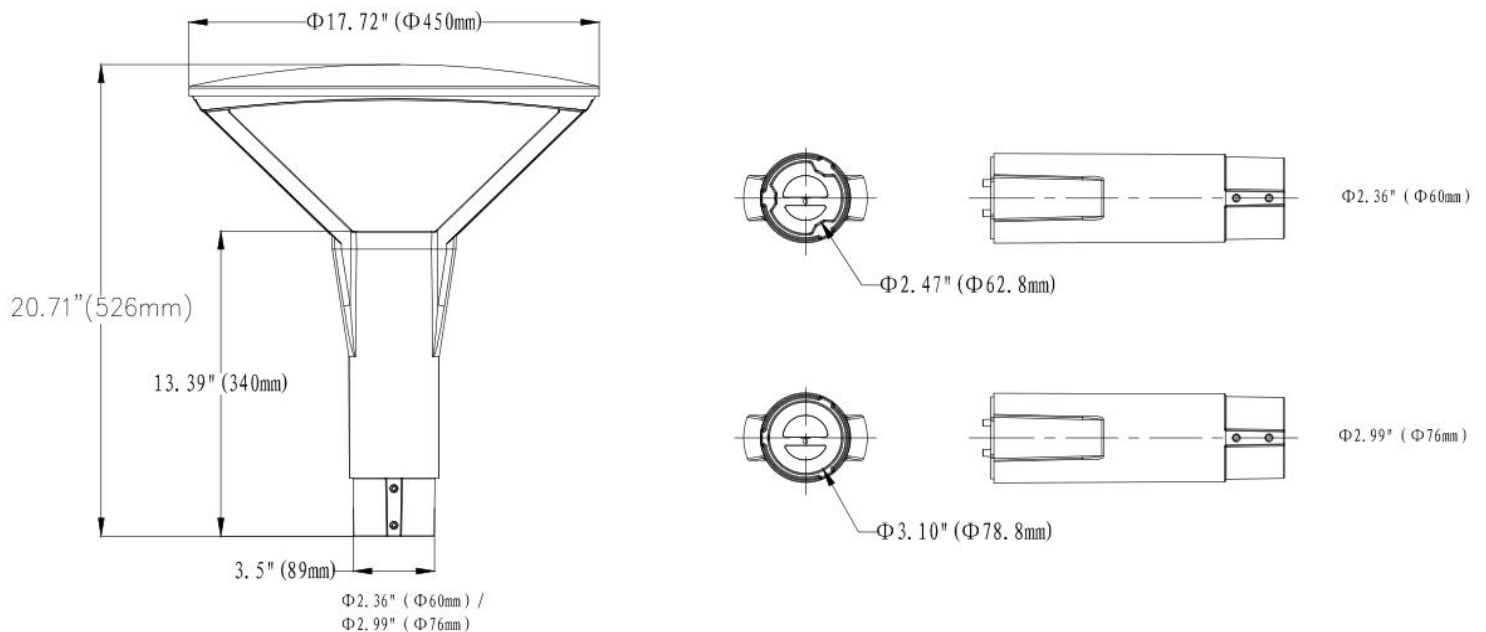

Accessories

Post top mount adaptor
Q235 materials with Powder Coating.
(60 to 76mm Dia)

